

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

**UTILITY PATENT APPLICATION
TRANSMITTAL LETTER
UNDER 37 C.F.R. 1.53(b)**

ATTORNEY DOCKET NO.:

10191/1172

Address to:

Assistant Commissioner for Patents
Washington D.C. 20231
Box Patent Application



Transmitted herewith for filing is a patent application.

Inventor(s): **Michael FRIEDOW and Dietmar RISCHEN**

For: **CONTACT ELEMENT FOR AXIAL CONTACTING**

1. Enclosed are:

- ☒ 1 sheet(s) of drawing(s).
- ☒ A certified copy of German Appln. 2 98 22 588.3 filed on December 18, 1998 on which priority is based.
- ☒ Assignment of the invention to Robert Bosch GmbH.
- ☒ A declaration/power of attorney.
- ☐ An Information Disclosure Statement and an accompanying PTO-1449.

Other: _____

2. The filing fee has been calculated as shown below:

	NUMBER FILED	NUMBER EXTRA*	RATE (\$)	FEE (\$)
BASIC FEE				760.00
TOTAL CLAIMS	15 - 20=	0	18.00	0.00
INDEPENDENT CLAIMS	1 - 3=	0	78.00	0.00
MULTIPLE DEPENDENT CLAIM PRESENT			260.00	
*Number extra must be zero or larger			TOTAL	760.00
If the applicant is a small entity under 37 C.F.R. §§ 1.9 and 1.27, then divide total fee by 2, and enter amount here.				SMALL ENTITY TOTAL

Please charge the required application filing fee of **\$760.00** to the deposit account of **Kenyon & Kenyon**, deposit account number **11-0600**.

EM36046166545

3. The Commissioner is hereby authorized to charge payment of the following fees, associated with this communication or arising during the pendency of this application, or to credit any overpayment, to the deposit account of **Kenyon & Kenyon**; deposit account number **11-0600**:

- A. Any additional filing fees required under 37 C.F.R. § 1.16;
- B. Any additional patent application processing fees under 37 C.F.R. § 1.17;
- C. Any additional document supply fees under 37 C.F.R. § 1.19;
- D. Any additional post-patent processing fees under 37 C.F.R. § 1.20; or
- E. Any additional miscellaneous fees under 37 C.F.R. § 1.21.

4. A duplicate copy of this letter is enclosed for that purpose.

Respectfully submitted,

Dated: 12/16/99

By: [Signature]
Richard L. Mayer
Reg. No. 22,490

KENYON & KENYON
One Broadway
New York, New York 10004
(212) 425-7200 (telephone)
(212) 425-5288 (facsimile)

CONTACT ELEMENT FOR AXIAL CONTACTING

Field Of The Invention

The present invention relates to a device for contacting an electrically operated apparatus having at least one terminal contact on the apparatus and one plug that can be connected to it axially, with the plug including a sleeve contact.

5

Background Information

Electrically operated apparatuses, e.g., hydraulic actuators such as solenoid valves and pressure regulators, must frequently be installed with a directional orientation in further processing, so that the electric contacts are located in a defined position. This is necessary, for example, when an arrangement of actuators is to be contacted jointly and electrically in one operation. For example, if the terminal contacts of the actuator are arranged laterally to its longitudinal axis, the position of the actuator must usually be changed, so that the terminal contacts can be connected to a suitable plug. The respective precise orientation of the actuators is an additional operation that is to be avoided. In addition, lateral contacting of the actuator leads to the result that tolerances in its longitudinal direction can hardly be compensated because, with radial contacting, displacement in the direction of the longitudinal axis is possible only to a limited extent because the contact area of the internal contact is usually limited. In radial contacting, the direction of joining of the actuator and of the plug contact are not identical, so two assembly directions are necessary when assembling the actuator on a carrier and when assembling the plug on the apparatus, so the assembly operation must necessarily be sequential.

20

Summary Of The Invention

Therefore, an object of the present invention is to provide a device for contacting an electrically operated apparatus, so that the contacting can be accomplished with less orientation complexity, and tolerances in the longitudinal direction of the apparatus can

25

EM 360461665us

be compensated easily. On the other hand, another object of the present invention is to permit simultaneous assembly of the apparatus and the plug.

According to the present invention, the terminal contact is oriented parallel to an installation direction of the apparatus, and the sleeve contact can be connected to the terminal contact parallel to the installation direction.

It has been found according to the present invention that assembly of one or more apparatuses on a carrier and connecting the respective plugs to the apparatuses can be accomplished simultaneously by axial contacting. If the plugging direction of the plugs corresponds to the installation direction of the apparatuses, only a precise radial orientation of the plugs is necessary, and thus axial compensation of tolerance is possible in the installation direction of the apparatuses due to the fact that the plugs need not be pushed onto the terminal contacts as far as the stop. Then contacting with a punched grid, for example, can take place simultaneously with assembly of an actuator. At the manufacturing plant, one direction of assembly may be eliminated through the axial assembly of the plugs, thereby reducing the expense in terms of workpiece carriers and devices.

In an especially advantageous embodiment of the present invention, the plug has two sleeve contacts, arranged concentrically in particular, which can be connected to two concentric terminal contacts of the apparatus. The electrically operated apparatus has two terminal contacts, preferably in a concentric arrangement, on the rear side, i.e., the side opposite the installation direction. The terminal contacts may be provided, for example, by two bushings arranged concentrically one inside the other. However, the contact on the inside may also be designed as a solid cylindrical contact, e.g., as a contact pin. Then the sleeve contacts of the plug are arranged concentrically one inside the other and fit together with the terminal contacts. The inside diameter of the sleeve contacts at the end is preferably such that they can be connected conveniently; for example, the front ends of the sleeves may be adapted to one another or may diverge conically.

The sleeve contacts are preferably each in contact with the concentric terminal contacts on the outside circumference when joined together. This results in an especially large contact area between the terminal contacts of the apparatus and the sleeve contacts.

5 In an especially advantageous embodiment of the present invention, the terminal contacts are two contact faces bent into a cylindrical shape in particular and provided on the end of an apparatus casing. These contact faces have different diameters and are arranged accordingly, so that an insulation bushing can optionally be inserted between the coaxial terminal contacts, and the two sleeve contacts of the plug can be
10 inserted without causing a short circuit between the sleeve contacts and the terminal contacts.

Insulation is preferably arranged between the terminal contacts. The insulation is made of plastic and in one case it is an insulation sleeve. However, the insulation may also be
15 applied as a nonconducting layer directly to the terminal contacts or the sleeve contacts. Different insulation materials may also be used with regard to a contacting force, in order to make it difficult to pull the contacts apart, for example.

In another preferred embodiment, in the assembled state the back wall of the plug also
20 forms an insulation which acts together with the insulation between the terminal contact to form two contact chambers insulated from one another. This yields protection against metal chips at the contact point in an especially advantageous manner. The two poles of the contact are completely covered with respect to one another by the back plastic wall of the plug. No short circuit can develop due to a long sliver. In addition, insulation
25 on the outside may also completely cover the contact in the manner of a casing. The internal terminal contact with the adjacent internal sleeve contact is then separated by the insulation sleeve from the outer terminal contact with the adjacent outer sleeve contact. However, the outer end of the insulation sleeve is also in contact with the insulated back wall of the plug, so that the internal terminal contact is encapsulated.

30 Only the connecting conductor leads radially out of the insulated area.

The printed conductor of the interior sleeve contact is preferably passed through a recess in the exterior sleeve contact. The sleeve contacts may be designed as cylindrical segments. A section of the essentially cylindrical segment remains free, with the printed conductor of the internal sleeve contact passing through this section and the sleeve contact on the outside.

Instead of a cylindrical or segmented cylindrical cross section, the sleeve contact may also have a polygonal cross section. The advantage of this cross section is that the plug can then no longer be rotated about its longitudinal axis or the installation direction with respect to the terminal contacts. This rotating may of course also be prevented in a traditional manner by a small lug which engages in a groove.

The sleeve contacts preferably have a diameter that allows a defined contacting force. The sleeve contacts may have inclined insertion guides to permit easy positioning of the terminal contacts.

The plugs are preferably connected to punched grid conductors. The sleeve contact and the corresponding punched grid conductor may be designed in one piece. The end of the punched grid conductor is designed to be somewhat wider than the punched grid conductor, and it may be bent to form the segmented cylindrical sleeve contact by bending or folding. This eliminates the need for an additional solder connection to connect the plug to the punched grid conductor.

Brief Description Of The Drawings

Figure 1 shows a side view of an actuator with concentrically arranged terminal contacts and a plug with sleeve contacts fitting it.

Figure 2 shows a top view of the plug with two sleeve contacts according to the present invention.

Detailed Description

Actuator 1 is installed in a machine 3 in an installation direction 2. A device for contacting the electrically operated actuator with a terminal contact 5 on the apparatus, a second terminal contact 6 on the apparatus and an insulation sleeve 7 arranged between them is provided at the end, i.e., on one end side 4 of elongated actuator 1 opposite the installation direction. Terminal contact 5 has a larger diameter than terminal contact 6, i.e., terminal contact 5 is arranged to lie on the outside.

A plug 8 is equipped with sleeve contacts 9 and 10 fitting terminal contacts 5 and 6. Plug 8 has an insulating back wall 11 and additional insulation means 12 to prevent a short circuit between a punched grid conductor 13 connected to plug 8 with exposed metal objects. Terminal contacts 5, 6 as well as sleeve contacts 9, 10 are arranged concentrically about a longitudinal axis 14 running through actuator 1.

During assembly, actuator 1 is mounted on machine 3 in the installation direction, and plug 8 with sleeve contacts 9 and 10 is placed on terminal contacts 5 and 6 either subsequently or simultaneously and is connected to them.

As shown best in Figure 2, sleeve contacts 9 and 10 are designed only as segmented cylinders. Consequently, punched grid conductor 15 of interior sleeve contact 10 can be passed through recess 16 in exterior sleeve contact 9 without resulting in a short circuit.

When terminal contacts 5, 6 and sleeve contacts 9, 10 are joined, insulation sleeve 7 with insulating back wall 11 of the plug forms a contact chamber around interior sleeve contact 10 and interior terminal contact 6. This makes it possible to avoid short circuits produced by machining residues from production.

What Is Claimed Is:

1. A device for contacting an electrically operated apparatus, comprising:
at least one terminal contact on a side of the apparatus, the at least one terminal contact being oriented parallel to an installation direction of the apparatus; and
a plug for connecting axially to the at least one terminal contact, the plug including at least one sleeve contact, the at least one sleeve contact and the at least one terminal contact being adapted to be assembled together parallel to the installation direction.
2. The device according to claim 1, wherein the at least one sleeve contact includes two concentric sleeve contacts, the at least one terminal contact including two concentric terminal contacts, the two sleeve contacts connecting to the two terminal contacts.
3. The device according to claim 2, wherein the sleeve contacts are each in contact with the terminal contacts on an outside circumference when joined together.
4. The device according to claim 2, wherein the terminal contacts have two contact plates bent into a cylindrical shape and situated on an end of a casing of the apparatus.
5. The device according to claim 2, further comprising an insulation situated between the terminal contacts.
6. The device according to claim 5, wherein the insulation includes an insulating sleeve composed of a plastic.
7. The device according to claim 5, wherein, in an assembled state, a back wall of the plug acts as a further insulation which, together with the insulation between the terminal contacts, form two contact chambers insulated from one another.

8. The device according to claim 1, wherein the at least one sleeve contact includes an interior sleeve contact and an exterior sleeve contact, a printed conductor of the interior sleeve contact passing through a recess in the exterior sleeve contact.
9. The device according to claim 1, wherein the at least one sleeve contact includes a cylindrical segment.
10. The device according to claim 1, wherein the at least one sleeve contact has a polygonal cross section.
11. The device according to claim 1, wherein the at least one sleeve contact has a diameter so as to overcome a predetermined contacting force when connected.
12. The device according to claim 2, wherein the sleeve contacts have inclined insertion guides.
13. The device according to claim 2, further comprising a plurality of punched grid conductors connected to the plug.
14. The device according to claim 13, wherein a first of the sleeve contacts and a first of the punched grid conductors are a one-piece unit, and a second of the sleeve contacts and a second of the punched grid conductors are a one-piece unit.
15. The device according to claim 13, wherein the sleeve contacts are formed by one of bending and folding the punched grid conductors.

Abstract Of The Disclosure

A device for contacting an electrically operated apparatus, having at least one terminal contact on the apparatus and one plug that can be connected to it axially, with the plug including a sleeve contact which is in contact with an electrically conducting contact area of the terminal contact after joining them, with the terminal contact being oriented parallel to an installation direction of the apparatus, and the sleeve contact being connectable to the terminal contact parallel to the installation direction.

5

220937

2025-04-23 14:44:44

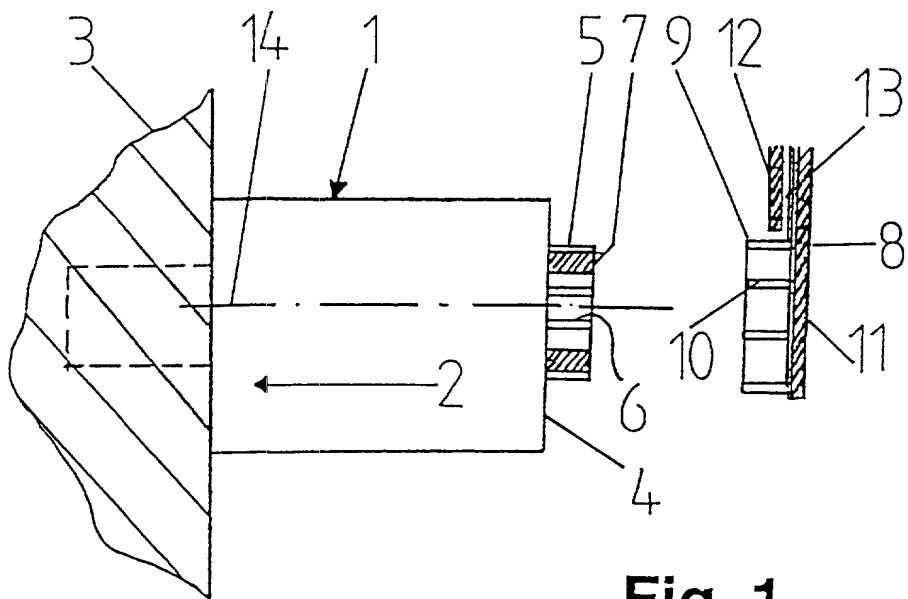


Fig. 1

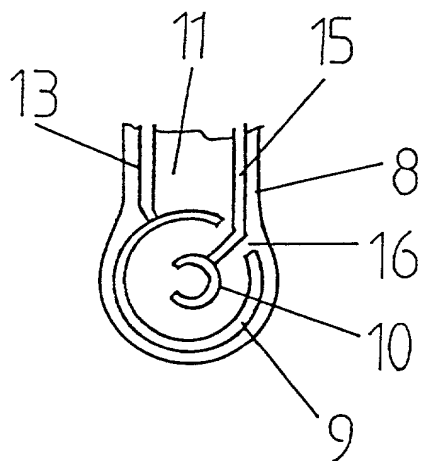


Fig. 2

**COMBINED DECLARATION AND
POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **CONTACT ELEMENT FOR AXIAL CONTACTING**, and the specification of which:

- ☒ is attached hereto;
- ☐ was filed as United States Application Serial No. _____ on _____, 19__ and was amended by the Preliminary Amendment filed on _____, 19__.
- ☐ was filed as PCT International Application Number _____ on the _____ day of June, 19__.
- ☐ an English translation of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international applications(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

EM 360461665us

**PRIOR FOREIGN/PCT APPLICATION(S)
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119**

Country : Germany

Application No. : 2 98 22 588.3

Date of Filing: December 18, 1998

Priority Claimed

Under 35 U.S.C. § 119 : ☒ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code § 120 of any United States Application or PCT International Application designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR
PCT INTERNATIONAL APPLICATIONS
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120**

U.S. APPLICATIONS

Number :

Filing Date :

**PCT APPLICATIONS
DESIGNATING THE U.S.**

PCT Number :

PCT Filing Date :

I hereby appoint the following attorney(s) and/or agents to prosecute the above-identified application and transact all business in the Patent and Trademark Office

connected therewith.

(List name(s) and registration number(s)):

Richard L. Mayer,	Reg. No. 22,490
Gerard A. Messina,	Reg. No. 35,952
_____	Reg. No. _____
_____	Reg. No. _____

All correspondence should be sent to:

Richard L. Mayer, Esq.
Kenyon & Kenyon
One Broadway
New York, New York 10004

Telephone No.: (212) 425-7200
Facsimile No.: (212) 425-5288

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of inventor Michael FRIEDOW

Inventor's signature M. Friedow Date Oct. 4th, 1998

Citizenship Federal Republic of Germany

Residence Am Linsenberg 8
71723 Grossbottwar
Federal Republic of Germany

Post Office Address Same as above

Full name of inventor Dietmar RISCHEN *Dietmar Rischen*

Inventor's signature *D. Rischen* Date Oct. 1, 1999

Citizenship Federal Republic of Germany

Residence Im Taigtrog 23
71665 Vaihingen/enz
Federal Republic of Germany

Post Office Address Same as above

EXPRESS MAIL CERTIFICATE

"EXPRESS MAIL" MAILING LABEL NUMBER EM360461665

DATE OF DEPOSIT 12/17/99


TYPE OF DOCUMENT Patent appn. of Friedman et al

SERIAL NO. _____ FILING DATE Hereinwith

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE, BY BEING HANDED TO A POSTAL CLERK OR BY BEING PLACED IN THE EXPRESS MAIL BOX BEFORE THE POSTED DATE OF THE LAST PICK UP, AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

BORIS POLANCO

(TYPED OR PRINTED NAME OF PERSON MAILING PAPER OR FEE)



(SIGNATURE OF PERSON MAILING PAPER OR FEE)

Title: Contact Element for Axial Controlling